

SERIES 6320 AIR OPERATED SIRENS



6320-003

The RVB air operated siren (air-horn) finds a diverse range of applications across a wide variety of industries within Australia.

Manufactured in Australia, it comes in a number of configurations.

Made from durable cast aluminium or bronze with a brass/bronze trumpet and an optional paint finish it has proven itself many hazardous environments.

Features:

- Corrosion resistant aluminium or bronze body construction.
- Painted or unpainted (brass/copper).
- Various frequencies in single units or arrays.
- Inherently safe for hazardous areas.
- Weather proof, no moving parts.

Additional benefits of this class of siren are:


- No electrical power needed, just compressed air.
- Distinctive sound
- Bracket/base provided for mounting



6320-006

Applications:

- Hazardous (flammable/corrosive) area warning siren. E.g. Mining, petrochemical, grain/flour stores.
- Factories/workshops "smoko" siren
- Railway or road transport vehicles
- Industrial plant failure warning etc.

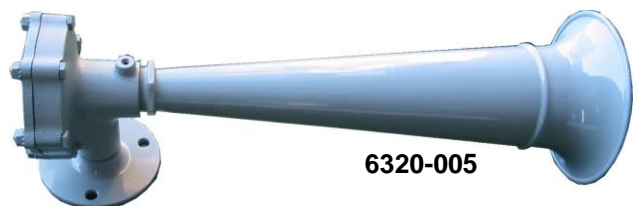

6320-005

Specifications



6320-220

Model	Type	Note Pitch/ Frequency	Average dB Output @ 1m	Air Input Pressure PSI	Air Usage CFM@100PSI	Dimensions mm
6320-003	Single	600 Hz	Up to 125db	50 -120	30	210x140x140
6320-004	Single	520 Hz	Up to 125db	50 -120	30	255x135x140
6320-005	Single	325/420 Hz	Up to 130db	50 -120	40	420x135x140
6320-006	Twin Chime	600Hz + 520Hz	Up to 132db	50 -120	60	255x270x220
6320-007	Three Chime	600Hz + 520Hz + 420Hz	Up to 132db	50 -120	90	360x390x200
6320-220	Single	240 Hz	Up to 139db	50 -120	30	TBA

Sirens & Horns Pty Ltd

Po Box 79 Moggill Qld 4070

Ph:1300 366 037 Mobile: 0413 961 447

sales@sirens.com.au

www.sirens.com.au

6320-011



100% Australian owned and made!